
CKAS T2s 2DOF Motion System (220kg / 500lb Payload)



Introduction

The CKAS T2s 2DOF Motion System, is specifically directed at **very low cost small scale motion simulator applications**, such as commercial and industrial simulators, consumer coin-operated arcade entertainment simulators or home built flight and racing entertainment simulators.

Target Applications

- **Small Scale Low Cost Entry Level Flight Training Applications**
- **Small Scale Commercial Vehicle and Truck Driver Training Simulators**
- **Small Scale Mining Equipment Simulators and Heavy Earth Moving Equipment Simulators**
- **Small Scale Train Driver Simulators**
- **Next Generation Unsupervised Coin-operated Motion Simulator Arcade Machines**
- **Home Built Flight Simulators**
- **Home Built Car Racing Simulators.**

General Description and Capabilities

The CKAS T2s 2DOF Motion System is Ideal for OEM manufacturers of existing simulator products or home builders who are looking for a cost effective method to instantly add motion to an existing or new design. This unit is pre-built to CKAS standards, and is USB plug and play straight out of the box. The only assembly required is to bolt on whatever goes on top of the motion system.

The CKAS T2s 2DOF Motion System features a mere 96kg total weight, 800mm total width for easily passing through doorways, and sits only 300mm high, therefore eliminating the need for any specialised stair or gangway for stepping up onto it. CKAS has used the technology it has developed for the heavier motion systems to design this unit, incorporating industry leading electronics, encoders and actuators.

The expected life of the T2s is extremely high for its price point, and the maintenance requirements are minimal, especially important in commercial or consumer based applications.

The CKAS T2s 2DOF motion system comes with the following key features:

- Fully Electric Actuation
- USB 2.0 plug and play
- Washout filters and acceleration onset cueing algorithms for:
 - Microsoft Flight Simulator FSX / 2004
 - Microsoft ESP
 - Lockheed Martin Prepar3D
 - X-Plane
 - rFactor (v1.255 or higher) and rFactor2
 - iRacing
 - Generic UDP interface for custom user program or other systems
- Basic Serial over USB interface for immediate connection to X-Sim or custom software to immediately move the motion system
- Very high speed update 100Hz motion controller for extremely smooth high fidelity response

General Specifications

(Subject to change without notification)

Product Name	CKAS T2s 2DOF Motion System
Product Code	T2sMP
Product Number	14.0001.11
Product Description	Small Scale 2 degree of freedom pitch-roll electric motion system
Harmonization Code (HS)	854370 or 854380 or 8543.70.96.50 (depending on Harmonisation system)

Mechanical Specifications

Architecture	2 Degree of Freedom Pitch – Roll Crank Arm
Actuation	Fully Electric
Nominal Width (Parked)	800 mm (31.5")
Nominal Length (Parked)	1180 mm (46.5")
Nominal Height (Parked)	300 mm (11.8")
Approx unit weight	96 kg (212 lb)
Anchoring Specification	Not required for this motion system

Performance Specifications

Payload Mass Limit	220 kg (500lb)
Payload Moment of Inertia	75 kg.m ² (1,780 lb.ft ²)
Payload CG horizontal offset	Less than 50mm from Centroid of Flying Platform
Payload CG Vertical offset	Less than 600mm high from top of Flying Platform
Payload Max Floor Size	2000mm x 2000mm (79" x 79")
Indep. Surge (disp. / vel. / accel.)	Not actuated
Indep. Sway (disp. / vel. / accel.)	Not actuated
Indep. Heave (disp. / vel. / accel.)	Not actuated
Indep. Yaw (disp. / vel. / accel.)	Not actuated
Indep. Pitch (disp. / vel. / accel.)	±8°, ±18°/s, ±160°/s ²
Indep. Roll (disp. / vel. / accel.)	±8°, ±18°/s, ±160°/s ²
Max Motion Excitation Frequency	50 Hz


Electrical Specifications

Power Supply Requirements	200 – 250V AC Single Phase @ 5 Amps
PC Connectivity	USB 2.0
Controller Update Frequency	100 Hz


Software Specifications

Interface Protocols	Serial over USB (Windows/Linux) / Optional Ethernet (OS independent)
Washout Algorithm Drive	Washout System with 6DOF optimisations for: <ul style="list-style-type: none">• Microsoft FSX / ESP / Lockheed Martin Prepar3D (Windows only)• X-Plane 9 / 10 (Windows only)• rFactor (v1.255 or higher) and rFactor2 (Windows only)• iRacing (Windows only)• Generic User Applications (any platform with Ethernet)
Direct Drive	Extended command set over Serial or (optional) Ethernet


View of Flying Platform from TOP

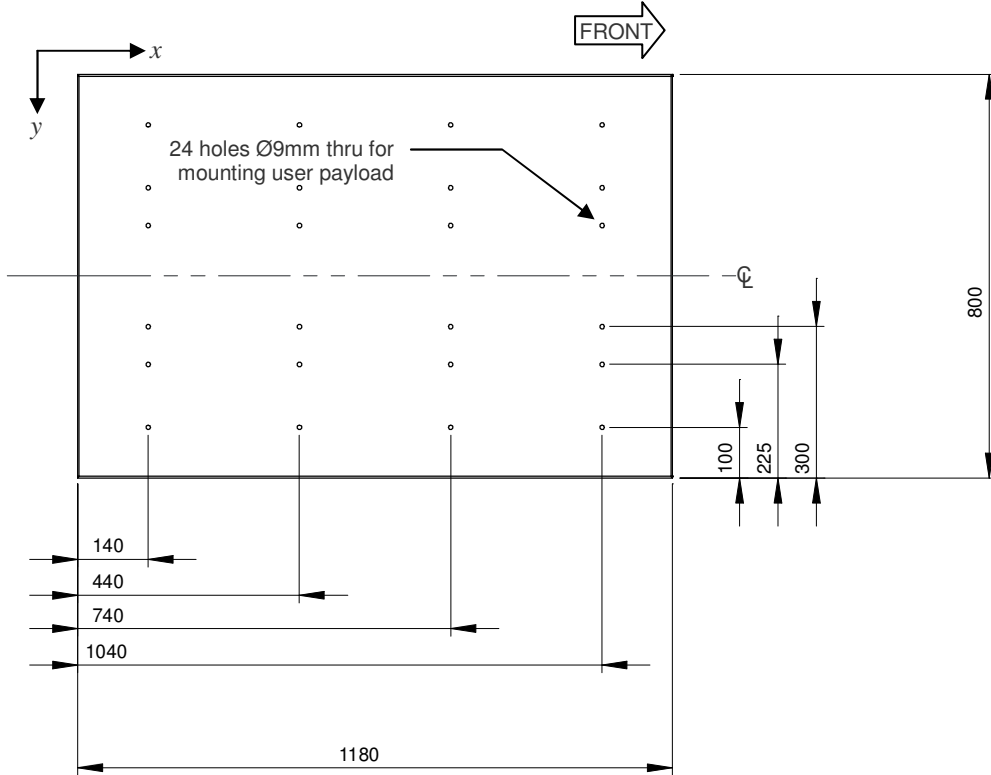


View of Motion System from RIGHT

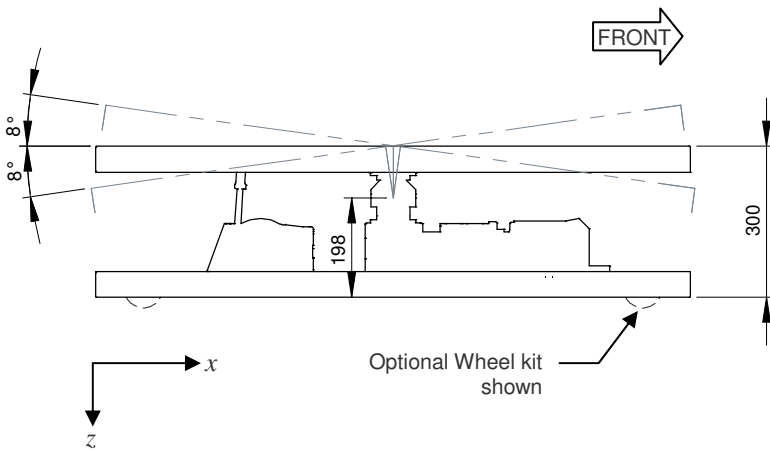

View of Motion System from FRONT

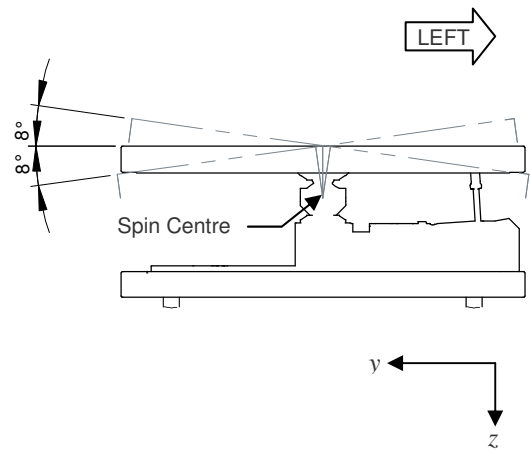

CKAS T5 2DOF Motion System (450kg / 1000lb Payload)

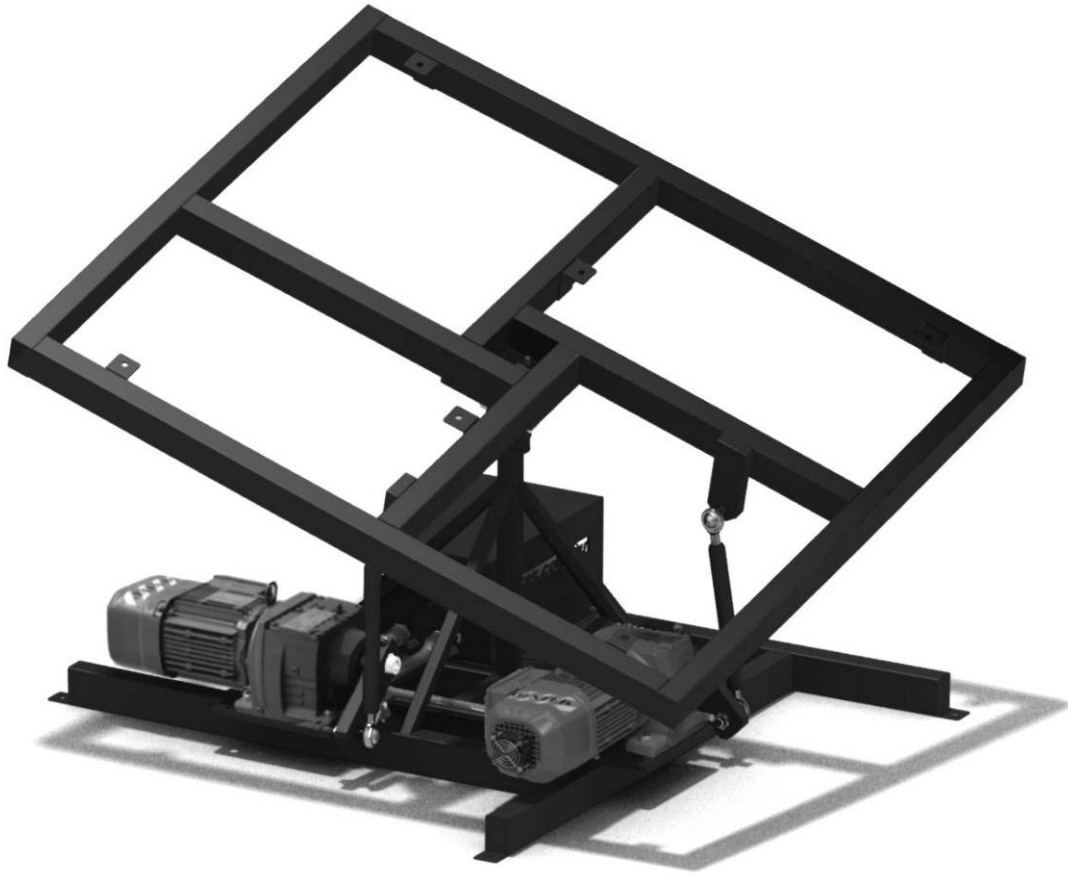

Introduction

The CKAS T5 2DOF Motion System, is specifically directed at **low cost medium scale motion simulator applications**, such as commercial and industrial simulators, operator manned arcade entertainment simulators or home built flight and racing entertainment simulators.

Target Applications

- **Medium Scale Low Cost Entry Level Flight Training Simulators for up to 2 people**
- **Medium Scale Commercial Vehicle and Truck Driver Training Simulators**
- **Medium Scale Mining Equipment Simulators and Heavy Earth Moving Equipment Simulators**
- **Medium Scale Train Driver Simulators**
- **Medium Scale Research Platforms**
- **Next Generation supervised Motion Simulator Arcade Systems**
- **Home Built Flight Simulators for up to 2 people**
- **Home Built Car Racing Simulators.**

General Description and Capabilities

The CKAS T5 2DOF Motion System is Ideal for OEM manufacturers of existing simulator products or home builders who are looking for a cost effective method to add motion to an existing or new design. This unit is built to CKAS standards, and is USB plug and play straight out of the box. The only assembly required is to bolt on whatever goes on top of the motion system.

The CKAS T5 2DOF Motion System features a lightweight RHS frame structure, can carry 450kg, has a massive 18° swing in any axis, and a high enough architecture to take a 2.4m size payload. CKAS has used the technology it has developed for the professional motion systems to design this unit, incorporating industry leading electronics, encoders and actuators.

The expected life of the T5 is extremely high for its price point, and the maintenance requirements are minimal, especially important in commercial or consumer based applications.

The CKAS T5 2DOF motion system comes with the following key features:

- Fully Electric Actuation
- USB 2.0 plug and play
- Ethernet 100BaseT interface for custom OS/Platform independent applications (optional extra)
- On board Washout filters and acceleration onset cueing algorithms for:
 - Microsoft Flight Simulator FSX / Microsoft ESP / Lockheed Martin Prepar3D
 - X-Plane 9 / 10
 - rFactor (v1.255 or higher) and rFactor2
 - iRacing
 - Generic custom user program or other systems with full washout cueing, inverse kinematics, forward kinematics and full diagnostics on board the motion system
- Configurable to be connected directly to X-Sim to support over 40 other popular games such as Dirt/Dirt2/Dirt3 F1 2010/2011/2012/2013/2014 and many more
- Basic Serial over USB or optionally UDP (over Ethernet or Local) interface for immediate connection to custom software
- Very high speed update 100Hz motion controller for extremely smooth high fidelity response

Specific “On-board” Functionalities

This motion system features the CKAS Generation III controller which has some very high level functionality available to the user, without the need for any CKAS software to be running on a host PC. The client software can directly interface to the motion system at a very high level, and is even platform independent with the optional Ethernet Module installed.

The CKAS Generation III controller features the following specific capabilities on board:

- **Full Inverse Kinematics** allowing the user to drive the machine in Cartesian co-ordinates from any custom application, over either USB serial (Windows/Linux only) or completely platform independent through an optional Ethernet Interface.
- **Full Forward Kinematics** allowing the user to read the actual current position of the motion system in real-time, allowing for a wide range of applications, including when the visual system is not mounted on the motion system and needs to be synchronised in the graphics (client software required to perform the graphical synchronisation).
- **Washout Cueing Filters** allowing the client to send high level kinematics data to the motion system in order to recreate the vehicle motion through the washout filters, all completely independent of any other software, and even completely platform independent on the optional Ethernet Interface.

General Specifications

(Subject to change without notification)

Product Name	CKAS T5 2DOF Motion System
Product Code	T5MP
Product Number	04.0001.11
Product Description	Medium Scale 2 degree of freedom pitch-roll electric motion system
Harmonization Code (HS)	854370 or 854380 or 8543.70.96.50 (depending on Harmonisation system)

Mechanical Specifications

Architecture	2 Degree of Freedom Pitch – Roll Crank Arm
Actuation	Fully Electric
Nominal Width (Parked)	1540 mm (60.6")
Nominal Length (Parked)	1540 mm (60.6")
Nominal Height (Parked)	750 mm (29.5")
Approx unit weight	220 kg (500 lb)
Anchoring Specification	4 places 13mm holes distributed to be anchored with 10-12mm fasteners

Performance Specifications

Payload Mass Limit	450 kg (1000lb)
Payload Moment of Inertia	250 kg.m ² (5,900 lb.ft ²)
Payload CG horizontal offset	Less than 100mm from Centroid of Flying Platform
Payload CG Vertical offset	Less than 600mm high from top of Flying Platform
Payload Max Floor Size	2400mm x 2400mm (95" x 95")
Indep. Surge (disp. / vel. / accel.)	Not actuated
Indep. Sway (disp. / vel. / accel.)	Not actuated
Indep. Heave (disp. / vel. / accel.)	Not actuated
Indep. Yaw (disp. / vel. / accel.)	Not actuated
Indep. Pitch (disp. / vel. / accel.)	±18°, ±30°/s, ±300°/s ²
Indep. Roll (disp. / vel. / accel.)	±18°, ±30°/s, ±300°/s ²
Max Motion Excitation Frequency	50 Hz


Electrical Specifications

Power Supply Requirements	200 – 250V AC Single Phase @ 7 Amps hard wired (no RCD)
Safety Interlocks	External User Park and Current Position Freeze on Power Fail
PC Connectivity	USB 2.0
Controller Update Frequency	100 Hz


Software Specifications

Interface Protocols	Serial over USB (Windows/Linux) / Optional Ethernet (OS independent)
Washout Algorithm Drive	Washout System with 6DOF optimisations for: <ul style="list-style-type: none"> • Microsoft FSX / ESP / Lockheed Martin Prepar3D (Windows only) • X-Plane 9 / 10 (Windows only) • rFactor (v1.255 or higher) and rFactor2 (Windows only) • iRacing (Windows only) • Generic User Applications (any platform with Ethernet)
Direct Drive	Extended command set over Serial or (optional) Ethernet


View of Base Mounting Holes from TOP

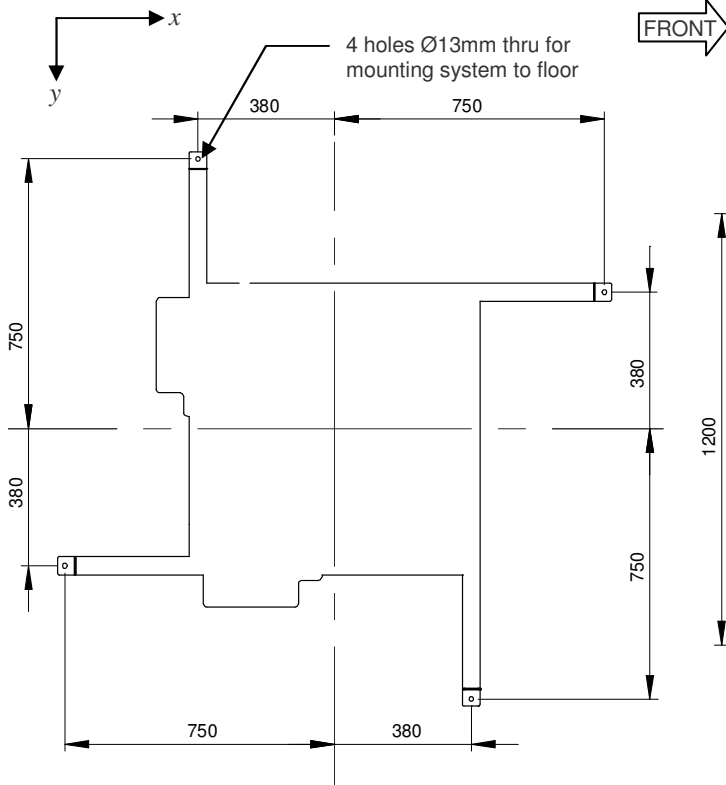


View of Flying Platform from TOP

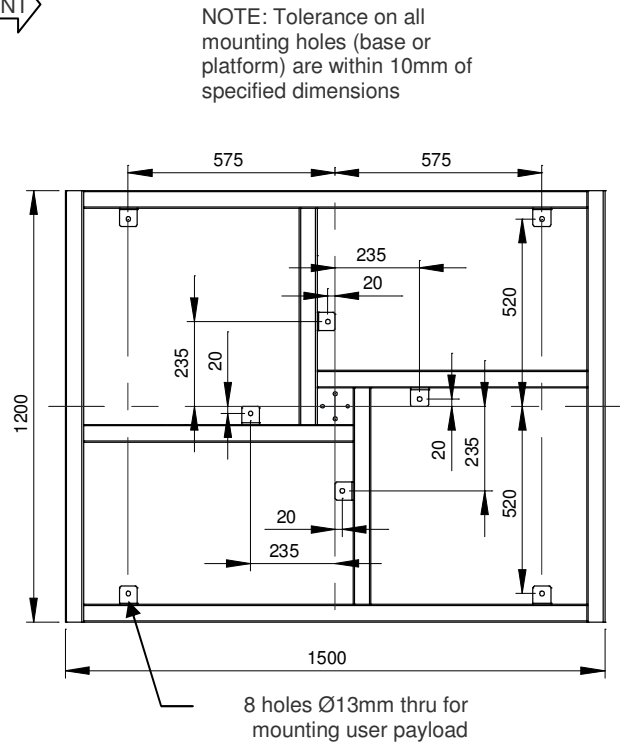


View of Motion System from RIGHT

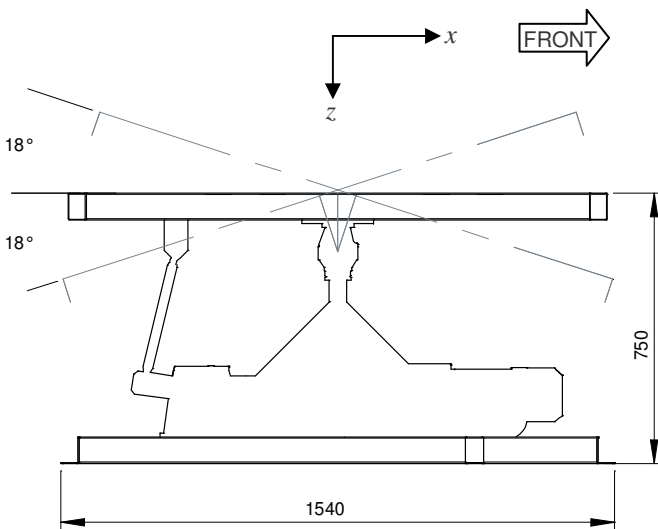

View of Motion System from FRONT

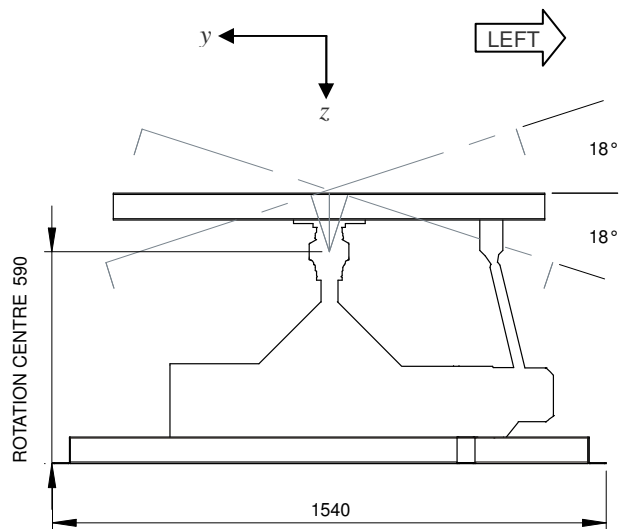

CKAS T10 2DOF Motion System (900kg / 2000lb Payload)

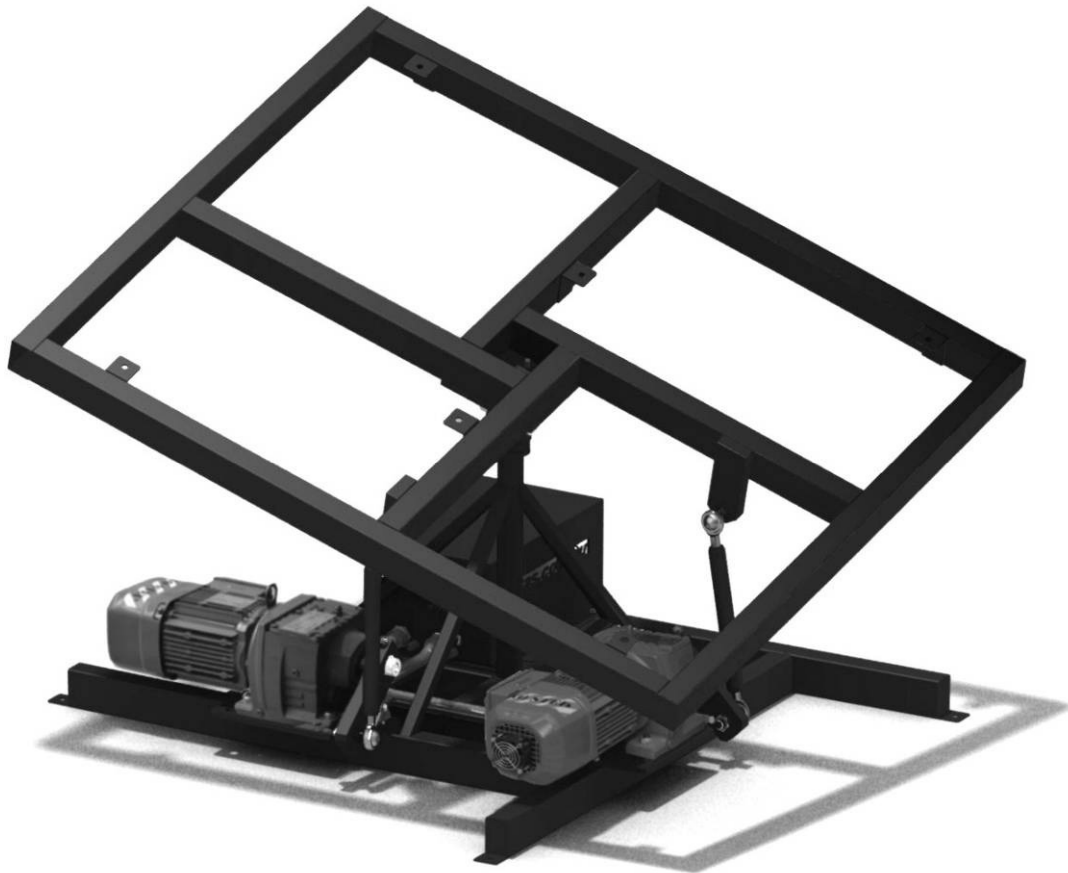

Introduction

The CKAS T10 2DOF Motion System, is specifically directed at **low cost medium scale motion simulator applications**, such as commercial and industrial simulators, operator manned arcade entertainment simulators or home built flight simulators.

Target Applications

- **Medium Scale Low Cost Flight Training Simulators for up to 4 people**
- **Medium Scale Commercial Vehicle and Truck Driver Training Simulators**
- **Medium Scale Mining Equipment Simulators and Heavy Earth Moving Equipment Simulators**
- **Medium Scale Train Driver Simulators**
- **Medium Scale Research Platforms**
- **Home Built Flight Simulators for up to 4 people**

General Description and Capabilities

The CKAS T10 2DOF Motion System is Ideal for OEM manufacturers of existing simulator products or home builders who are looking for a cost effective method to add motion to an existing or new design. This unit is built to CKAS standards, and is USB plug and play straight out of the box. The only assembly required is to bolt on whatever goes on top of the motion system.

The CKAS T10 2DOF Motion System features a lightweight RHS frame structure, can carry 900kg, can swing 12° in any axis, and a high enough architecture to take a 2.4m size payload. CKAS has used the technology it has developed for the 6DOF professional motion systems to design this unit, incorporating industry leading electronics, encoders and actuators.

The expected life of the T10 is extremely high for its price point, and the maintenance requirements are minimal, especially important in commercial or consumer based applications.

The CKAS T10 2DOF motion system comes with the following key features:

- Fully Electric Actuation
- USB 2.0 plug and play
- Ethernet 100BaseT interface for custom OS/Platform independent applications (optional extra)
- On board Washout filters and acceleration onset cueing algorithms for:
 - Microsoft Flight Simulator FSX / Microsoft ESP / Lockheed Martin Prepar3D
 - X-Plane 9 / 10
 - rFactor (v1.255 or higher) and rFactor2
 - iRacing
 - Generic custom user program or other systems with full washout cueing, inverse kinematics, forward kinematics and full diagnostics on board the motion system
- Configurable to be connected directly to X-Sim to support over 40 other popular games such as Dirt/Dirt2/Dirt3 F1 2010/2011/2012/2013/2014 and many more
- Basic Serial over USB or optionally UDP (over Ethernet or Local) interface for immediate connection to custom software
- Very high speed update 100Hz motion controller for extremely smooth high fidelity response

Specific “On-board” Functionalities

This motion system features the CKAS Generation III controller which has some very high level functionality available to the user, without the need for any CKAS software to be running on a host PC. The client software can directly interface to the motion system at a very high level, and is even platform independent with the optional Ethernet Module installed.

The CKAS Generation III controller features the following specific capabilities on board:

- **Full Inverse Kinematics** allowing the user to drive the machine in Cartesian co-ordinates from any custom application, over either USB serial (Windows/Linux only) or completely platform independent through an optional Ethernet Interface.
- **Full Forward Kinematics** allowing the user to read the actual current position of the motion system in real-time, allowing for a wide range of applications, including when the visual system is not mounted on the motion system and needs to be synchronised in the graphics (client software required to perform the graphical synchronisation).
- **Washout Cueing Filters** allowing the client to send high level kinematics data to the motion system in order to recreate the vehicle motion through the washout filters, all completely independent of any other software, and even completely platform independent on the optional Ethernet Interface.

General Specifications

(Subject to change without notification)

Product Name	CKAS T10 2DOF Motion System
Product Code	T10MP
Product Number	21.0001.11
Product Description	Medium Scale 2 degree of freedom pitch-roll electric motion system
Harmonization Code (HS)	854370 or 854380 or 8543.70.96.50 (depending on Harmonisation system)

Mechanical Specifications

Architecture	2 Degree of Freedom Pitch – Roll Crank Arm
Actuation	Fully Electric
Nominal Width (Parked)	1540 mm (60.6")
Nominal Length (Parked)	1540 mm (60.6")
Nominal Height (Parked)	750 mm (29.5")
Approx unit weight	270 kg (595 lb)
Anchoring Specification	4 places 13mm holes distributed to be anchored with 10-12mm fasteners

Performance Specifications

Payload Mass Limit	900 kg (2000lb)
Payload Moment of Inertia	400 kg.m ² (9,500 lb.ft ²)
Payload CG horizontal offset	Less than 100mm from Centroid of Flying Platform
Payload CG Vertical offset	Less than 600mm high from top of Flying Platform
Payload Max Floor Size	3200mm x 3200mm (126" x 126")
Indep. Surge (disp. / vel. / accel.)	Not actuated
Indep. Sway (disp. / vel. / accel.)	Not actuated
Indep. Heave (disp. / vel. / accel.)	Not actuated
Indep. Yaw (disp. / vel. / accel.)	Not actuated
Indep. Pitch (disp. / vel. / accel.)	±12°, ±20°/s, ±200°/s ²
Indep. Roll (disp. / vel. / accel.)	±12°, ±20°/s, ±200°/s ²
Max Motion Excitation Frequency	50 Hz

Electrical Specifications

Power Supply Requirements	200 – 250V AC Single Phase @ 12 Amps hard wired (no RCD)
Safety Interlocks	External User Park and Current Position Freeze on Power Fail
PC Connectivity	USB 2.0
Controller Update Frequency	100 Hz


Software Specifications

Interface Protocols	Serial over USB (Windows/Linux) / Optional Ethernet (OS independent)
Washout Algorithm Drive	Washout System with 6DOF optimisations for: <ul style="list-style-type: none">• Microsoft FSX / ESP / Lockheed Martin Prepar3D (Windows only)• X-Plane 9 / 10 (Windows only)• rFactor (v1.255 or higher) and rFactor2 (Windows only)• iRacing (Windows only)• Generic User Applications (any platform with Ethernet)
Direct Drive	Extended command set over Serial or (optional) Ethernet


CKAS T10 2DOF Motion System Engineering Dimensions

(Subject to change without notification)


View of Base Mounting Holes from TOP

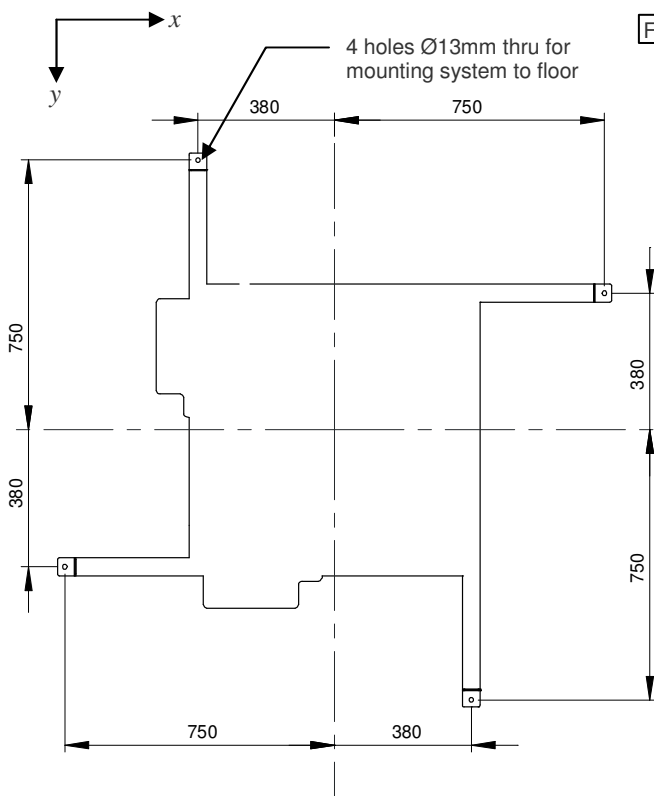

View of Flying Platform from TOP

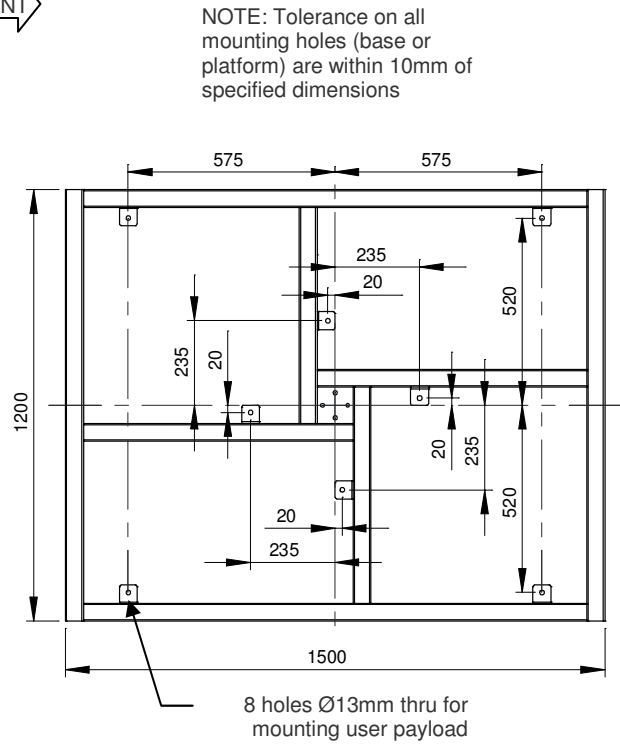

View of Motion System from RIGHT

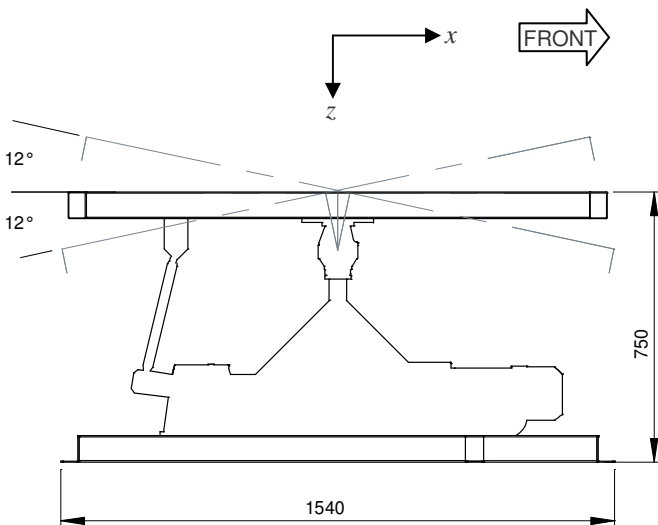

View of Motion System from FRONT

